



Ordering data

6SL3210-1KE12-3UB1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

| Rated data | | General tech. specifications | |
|---|---------------------------|--|--|
| Input | | Power factor λ | 0.70 ... 0.85 |
| Number of phases | 3 AC | Offset factor $\cos \varphi$ | 0.95 |
| Line voltage | 380 ... 480 V +10 % -20 % | Efficiency η | 0.97 |
| Line frequency | 47 ... 63 Hz | Sound pressure level (1m) | 52 dB |
| Rated current (LO) | 2.90 A | Power loss | 0.05 kW |
| Rated current (HO) | 2.50 A | Ambient conditions | |
| Output | | Cooling | Air cooling using an integrated fan |
| Number of phases | 3 AC | Cooling air requirement | 0.005 m ³ /s |
| Rated voltage | 400 V | Installation altitude | 1000 m |
| Rated power (LO) | 0.75 kW | Ambient temperature | |
| Rated power (HO) | 0.55 kW | Operation | -10 ... 40 °C (14 ... 104 °F) |
| Rated current (IN) | 2.50 A | Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Rated current (LO) | 2.20 A | Storage | -40 ... 70 °C (-40 ... 158 °F) |
| Rated current (HO) | 1.70 A | Relative humidity | |
| Max. output current | 3.40 A | Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |
| Pulse frequency | 4 kHz | Closed-loop control techniques | |
| Output frequency for vector control | 0 ... 240 Hz | V/f linear / square-law / parameterizable | Yes |
| Output frequency for V/f control | 0 ... 650 Hz | V/f with flux current control (FCC) | Yes |
| In firmware V4.7 and higher, due to legal requirements, the maximum output frequency is restricted to 550 Hz. | | V/f ECO linear / square-law | Yes |
| Overload capability | | Sensorless vector control | Yes |
| Low Overload (LO) | | Vector control, with sensor | No |
| 150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time | | Encoderless torque control | No |
| High Overload (HO) | | Torque control, with encoder | No |
| 200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time | | Communication | |
| | | Communication | RS485 |



Ordering data

6SL3210-1KE12-3UB1

Mechanical data

| | |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Size | FSA |
| Net weight | 1.70 kg |
| Width | 73.0 mm |
| Height | 196.0 mm |
| Depth | 203.0 mm |

Inputs/ outputs

Standard digital inputs

| | |
|----------------------|-------|
| Number | 6 |
| Switching level: 0→1 | 11 V |
| Switching level: 1→0 | 5 V |
| Max. inrush current | 15 mA |

Fail-safe digital inputs

| | |
|--------|---|
| Number | 1 |
|--------|---|

Digital outputs

| | |
|------------------------------------|--------------|
| Number as relay changeover contact | 1 |
| Output (resistive load) | DC 30 V, 1 A |
| Number as transistor | 1 |
| Output (resistive load) | DC 30 V, 1 A |

Analog/ digital inputs

| | |
|--------|------------------------|
| Number | 1 (Differential input) |
|--------|------------------------|

Analog outputs

| | |
|--------|-------------------------|
| Number | 1 (Non-isolated output) |
|--------|-------------------------|

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ± 5 °C

Standards

| | |
|---------------------------|---|
| Compliance with standards | UL, cUL, CE, C-Tick |
| CE marking | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |

Connections

Signal cable

| | |
|-------------------------|---|
| Conductor cross-section | 0.15 ... 1.50 mm ² (28 ... 16 AWG) |
|-------------------------|---|

Line side

| | |
|-------------------------|---|
| Version | Plug-in screw-type terminals |
| Conductor cross-section | 1.00 ... 2.50 mm ² (16 ... 14 AWG) |

Motor end

| | |
|-------------------------|---|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.00 ... 2.50 mm ² (16 ... 14 AWG) |

DC link (for braking resistor)

| | |
|-------------------------|---|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.00 ... 2.50 mm ² (16 ... 14 AWG) |


| | |
|---------------|--------------------------|
| PE connection | On housing with M4 screw |
|---------------|--------------------------|

Max. motor cable length

| | |
|------------|-------|
| Shielded | 50 m |
| Unshielded | 100 m |

Converter losses to EN 50598-2*

| | |
|--|----------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | -79.60 % |

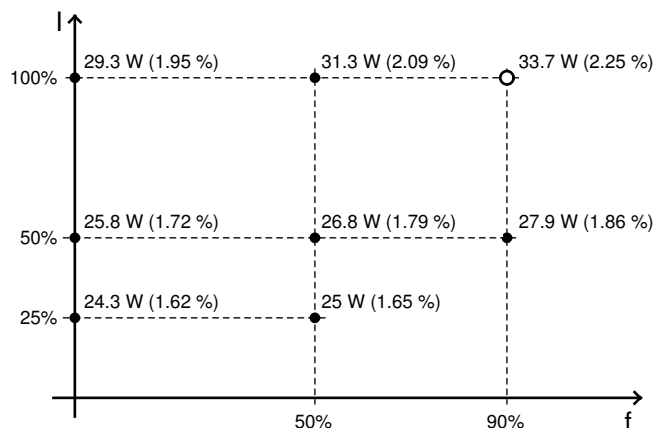

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard