3RT1015-1AN22 Page 1

SIEMENS

Product data sheet 3RT1015-1AN22




CONTACTOR, AC-3 3 KW/400 V, 1 NC, AC 220V 50/60HZ 3-POLE, SIZE S00, SCREW CONNECTION

General details:		
Size of the contactor	S00	
Number of poles	3	
Control circuit:		
Design of activation of the operating mechanism	conventional	
Type of voltage	AC	
Control supply voltage		
• at 50 Hz / for AC / rated value / minimum	220 V	
at 50 Hz / for AC / rated value / maximum	220 V	
at 60 Hz / for AC / rated value / minimum	220 V	
at 60 Hz / for AC / rated value / maximum	220 V	
Supply voltage frequency / for auxiliary and control current circuit / rated value		
• minimum	50 Hz	
• maximum	60 Hz	
Main circuit:		
Number of NC contacts / for main contacts	0	
Number of NO contacts / for main contacts	3	
Operating current		

3RT1015-1AN22 Page 2

• at AC-3 / at 400 V / rated value	7 A
• at AC-1 / at 400 V / rated value	18 A
Service power	
• at AC-3 / at 400 V / rated value	3 kW
• at AC-1 / at 400 V / rated value	11 kW
Auxiliary circuit:	
Identification number and letter for switching elements	01
Number of NO contacts / for auxiliary contact	0
Number of NC contacts / for auxiliary contact	1
Connection type:	
Design of the electrical connection / for main current circuit	screw-type terminals
Design of the electrical connection / for auxiliary and control current circuit	screw-type terminals
Mounting/fixing:	
Type of fixing/fixation	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Series installation	Yes

3RT1015-1AN22 Page 3

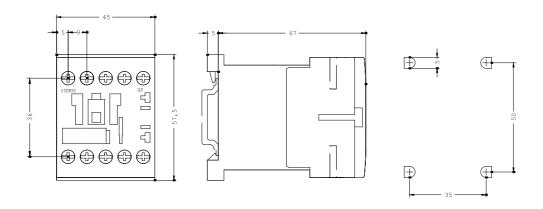

last change: 10/31/2006

Technical Assistance:	Telephone:	+49 (0) 911-895-5900 (8°° - 17°° CET)
	Fax:	+49 (0) 911-895-5907
	E-Mail:	technical-assistance@siemens.com
	Internet:	www.siemens.de/lowvoltage/technical-assistance